


HEX

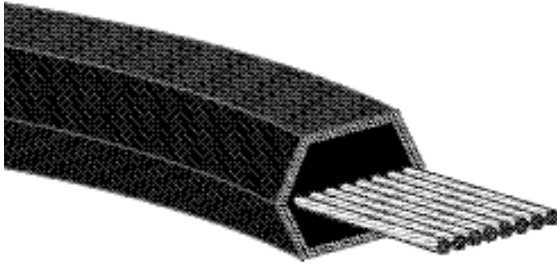

Part No: BB75

BB B Section Double
Classical Profile 0.66" Center Width
75 Approximate 75" Inside Length

DEPENDABLE POWER FROM BOTH SIDES

Hex belts, also known as double V-belts, are designed for use on drives with one or more reverse bends. They usually transmit power from both sides of the belt.

To meet the multiple-bend and dual-power requirements, Goodyear builds Hex belts with rugged Vytacord tension members. They deliver maximum strength with minimum elongation. They also work with all the other quality materials that are a part of Goodyear Hex belts to deliver maximum performance over a long, trouble-free life.

Goodyear Hex belts are available in AA, BB, and CC cross sections. A special Dry Can Hex construction is available with a special deep CC cross section designated CCP.

APPLICATIONS

Used on drives having one or more reverse bends and usually where power must be transmitted to or from the belt in both the usual and reverse positions.

- Lawn and Garden Equipment
- Agitators
- Conveyors
- Mixers
- Mule Drives
- Crushers


KEY FEATURES & BENEFITS

- Dual-sided classical profile.
- High-strength Vytacord tensile members.
- Engineered rubber compound-impregnated envelope.
- Goodyear's engineered rubber cushion and insulation.
- Oil, heat, ozone, and abrasion resistant.
- Static conductive.




HEX

AA




Part Number	Approx. Outside Length (in)	Part Number	Approx. Outside Length (in)	Part Number	Approx. Outside Length (in)	Part Number	Approx. Outside Length (in)
AA51	54.4	AA68	71.4	AA90	93.4	AA120	123.4
AA55	58.4	AA70	73.4	AA92	95.4	AA128	131.4
AA60	63.4	AA75	78.4	AA96	99.4		
AA64	67.4	AA80	83.4	AA105	108.4		
AA66	69.4	AA85	88.4	AA112	115.4		

BB




Part Number	Approx. Outside Length (in)	Part Number	Approx. Outside Length (in)	Part Number	Approx. Outside Length (in)	Part Number	Approx. Outside Length (in)
BB35	39.6	BB83	87.6	BB120	124.6	BB182	186.6
BB38	42.6	BB85	89.6	BB122	126.6	BB190	194.6
BB42	46.6	BB90	94.6	BB123	127.6	BB195	199.6
BB43	47.6	BB92	96.6	BB124	128.6	BB210	214.6
BB45	49.6	BB93	97.6	BB128	132.6	BB225	228.1
BB46	50.6	BB94	98.6	BB129	133.6	BB226	229.1
BB53	57.6	BB96	100.6	BB130	134.6	BB228	231.1
BB55	59.6	BB97	101.6	BB136	140.6	BB230	233.1
BB60	64.6	BB103	107.6	BB140	144.6	BB240	243.1
BB64	68.6	BB105	109.6	BB144	148.6	BB255	258.1
BB68	72.6	BB107	111.6	BB155	159.6	BB267	270.1
BB71	75.6	BB108	112.6	BB158	162.6	BB270	273.1
BB72	76.6	BB111	115.6	BB162	166.6	BB273	276.1
BB73	77.6	BB112	116.6	BB168	172.6	BB277	280.1
BB74	78.6	BB116	120.6	BB169	173.6	BB278	281.1
BB75	79.6	BB117	121.6	BB173	177.6	BB285	288.1
BB81	85.6	BB118	122.6	BB180	184.6	BB300	308.1

CC



Part Number	Approx. Outside Length (in)	Part Number	Approx. Outside Length (in)	Part Number	Approx. Outside Length (in)	Part Number	Approx. Outside Length (in)
CC75	81.4	CC120	126.4	CC173	179.4	CC270	274.4
CC81	87.4	CC128	134.4	CC180	186.4	CC300	304.4
CC85	91.4	CC136	142.4	CC195	201.4	CC330	334.4
CC90	96.4	CC144	150.4	CC210	216.4	CC360	364.4
CC96	102.4	CC148	154.4	CC225	229.4	CC390	394.4
CC105	111.4	CC158	164.4	CC240	244.4	CC420	424.4
CC112	118.4	CC162	168.4	CC255	259.4		

CCP



Part Number	Approx. Outside Length (in)	Part Number	Approx. Outside Length (in)	Part Number	Approx. Outside Length (in)	Part Number	Approx. Outside Length (in)
CCP240	244.9	CCP408	412.9	CCP550	554.9	CCP700	704.9
CCP255	259.9	CCP420	424.9	CCP578	582.9	CCP720	724.9
CCP270	274.9	CCP440	444.9	CCP600	604.9	CCP750	754.9
CCP300	304.9	CCP450	454.9	CCP640	644.9	CCP780	784.9
CCP330	334.9	CCP470	474.9	CCP660	664.9	CCP800	804.9
CCP360	364.9	CCP480	484.9	CCP670	674.9	CCP840	844.9
CCP390	394.9	CCP540	544.9	CCP680	684.9	CCP900	904.9

V - B E L T